



SEH series HIDEELS PUMPS which are applicable to all purposes

PGH-50GC

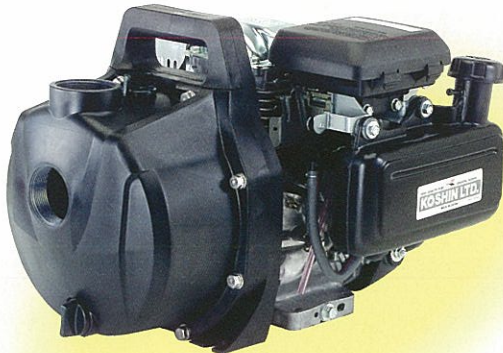

PGH-50GX

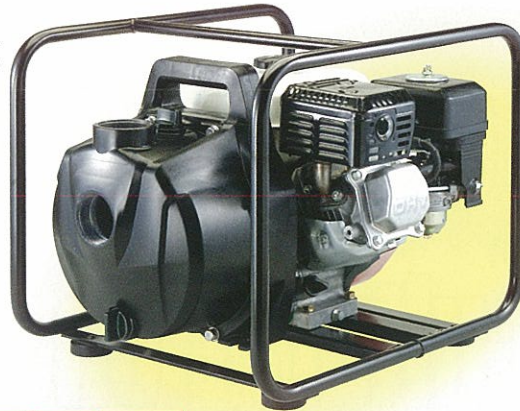


Applications

- General farming liquid fertilizer, herbicides and pesticides
- Sea water fish farming
- Brine for preserving food
- Irrigation, pumping well water, feeding/draining water to water reserve, etc

Outstanding features

- Compact in design
- Superior material used
- PET (Polyethylene Terephthalate) for pump casing, impeller and volute casing
- EPDM and carbon ceramic for mechanical seal
- SUS for all bolts and washers
- Powered by strong and durable Honda engine

Performance curve

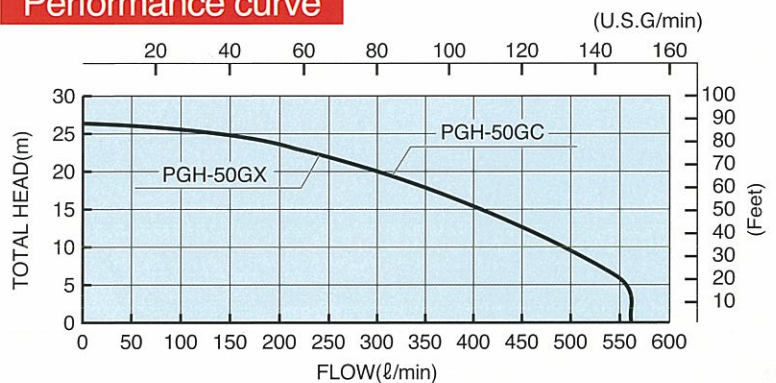

Specifications

	PGH-50GC	PGH-50GX
Suction & Discharge Size	50mm (2") NPT	50mm (2") BSP
Maximum Suction Head	8m (26FT)	
Maximum Discharge Head	26m (85.5FT)	
Maximum Pressure	0.26Mpa (37PSI)	
Maximum Flow	5606/min (U·S·G148/min)	
Mechanical Seal	Ceramic Carbon	
Net Weight	17.5kg (39LBS)	19kg (42LBS)
Gross Weight	20.5kg (45LBS)	22kg (48.5LBS)
Case	525×420×370 (2.88CFT)	540×418×433 (3.45CFT)
Engine	HONDA GC-135	HONDA GX-120

For the purpose of improvement, specifications are subject to changes without notice.