

OROFLEX



APLICACIONES

- Air compressors for road and construction work
- Compressors for drilling machinery
- Pumping of high performance liquids
- Applications requiring very high resistance to abrasion

CHARACTERISTICS

Colour: Yellow.


Composition: Synthetic rubber and Polyester-Polyamide textile.

Surface: Fine ribbed, highly resistant to abrasion.

Service Temperature: >From -20 °C to + 80 °C

Standard Length: 60 m (up to 200 m to order).

| | | |
|---------------------|---------|-------------------|
| WATER SERVICE PRES. | = 5 / 3 | AIR SERVICE PRES. |
|---------------------|---------|-------------------|

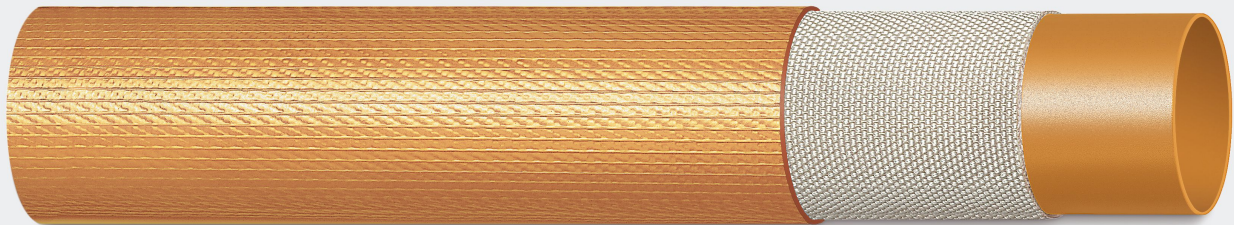

| Code | Nominal diameter | | Wall thickness mm. | Weight/ metre gr. | AIR Service/Bursting Pressure bar | Traction limit for no tearing Kg | Curvature radius mts |
|--------|------------------|--------|-----------------------|-------------------------|--------------------------------------|-------------------------------------|-------------------------|
| | mm. | Inches | | | | | |
| 01200 | 19 | 3/4 | 2,5 | 180 | 20 / 160 | 300 | 0,250 |
| - | 19 | 3/4 | 3,5 | 230 | 20 / 160 | 300 | 0,250 |
| 01201 | 27 | 1 | 3,5 | 235 | 20 / 100 | 750 | 0,250 |
| - | 27 | 1 | 4 | 275 | 20 / 100 | 750 | 0,250 |
| 01203 | 38 | 1 1/2 | 3,5 | 440 | 15 / 75 | 1.200 | 0,650 |
| 01204 | 45 | 1 3/4 | 3,5 | 520 | 15 / 75 | 1.400 | 0,750 |
| 01205 | 52 | 2 | 3,5 | 650 | 10 / 50 | 1.500 | 1,200 |
| *01208 | 65 | 2 1/2 | 4 | 750 | 10 / 50 | 2.050 | 1,250 |
| 01206 | 76 | 3 | 4 | 950 | 10 / 50 | 2.600 | 1,300 |
| 01207 | 102 | 4 | 4 | 1.275 | 10 / 50 | 3.780 | 1,700 |
| *01208 | 127 | 5 | 4 | 1.800 | 10 / 50 | 5.980 | 1,970 |
| *01209 | 152 | 6 | 4 | 2.100 | 10 / 50 | 7.280 | 1,970 |
| *01210 | 204 | 8 | 4,5 | 2.550 | 10 / 50 | 9.320 | 2,250 |

In yellow version OROFLEX 20 HD reinforced

* To order