


SIL2 HI TEMP DUCTING

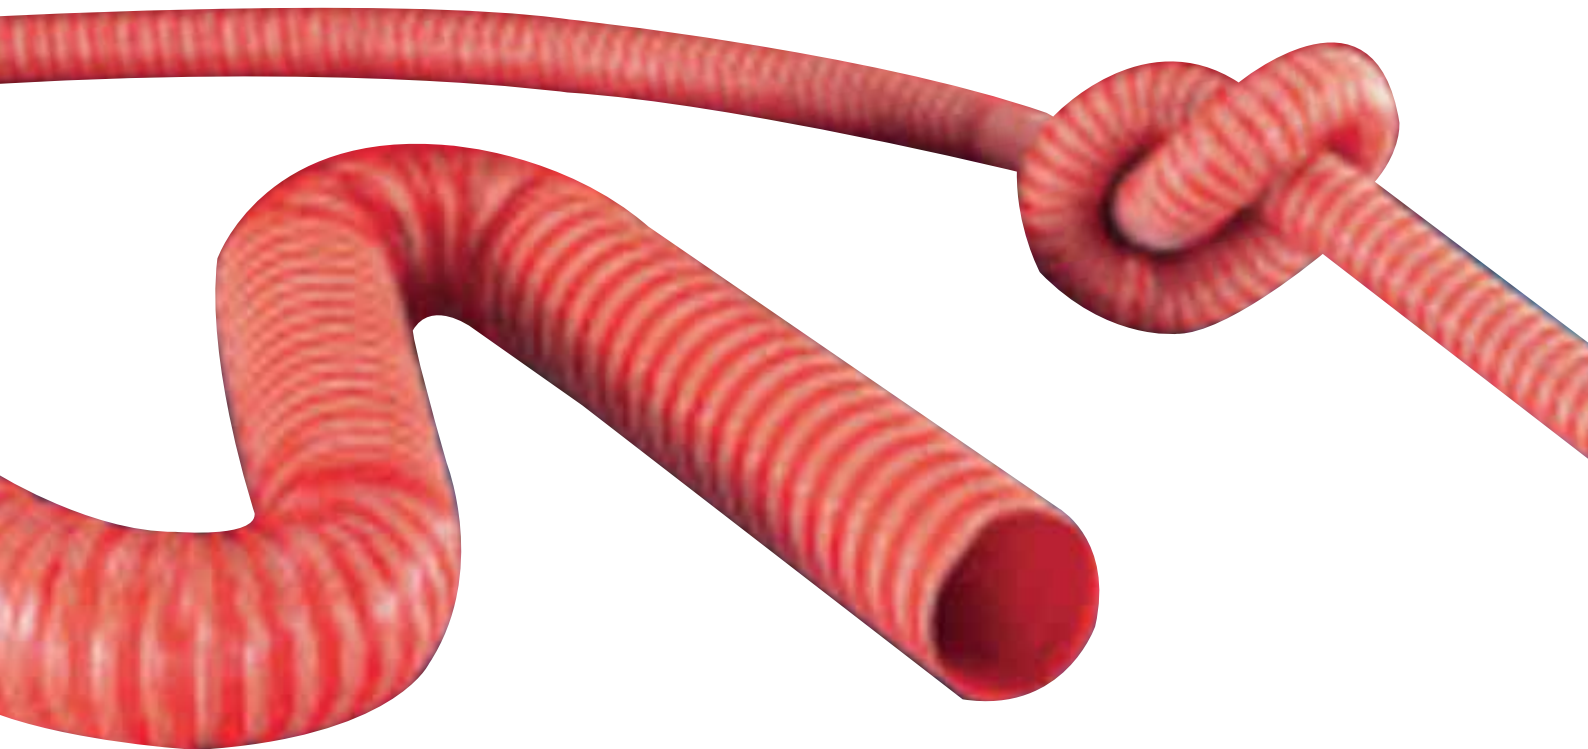


High-temperature suction and blast hose

Silicone, double-layer, leak-proof, smooth interior (to 260°C)

Applications:

- as conductor of hot and cold air
- for exhaust gas technique, engine construction, engine warming and aircraft construction
- for printing machines, blowers and compressors
- for granulate dryers in the plastics industry

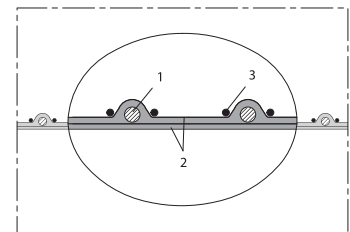

SIL2 HI TEMP DUCTING

Properties

- double-layer
- very good heat resistance
- leak-proof
- smooth interior
- flexible
- fibre reinforced
- small bending radiuses
- kink-proof
- conform to RoHS guideline

Temperature Range

- -70°C to 260°C
- short time to 280°C

Design, Material

1. spring steel wire integrated in wall
2. fabric-reinforced tape; wall: Silicon coated glass fabric
3. cord as reinforcement

Delivery variants

- further diameters and lengths available on request
- wireless sleeves

I.D. in / mm	O.D. mm	Over- pressure bar	Under- pressure bar	Bending Radius mm	Weight kg/m	Dimensions in Stock m	Further Production Lengths m	Order No.
- / 13	16	3,000	0,740	9,5	0,070	-	4	391-0013-2005
3/4 / 19	22	3,000	0,730	12,5	0,110	4	-	391-0019-2005
- / 22	25	3,000	0,720	14,0	0,170	4	-	391-0022-2005
1 / 25	30	2,800	0,710	17,5	0,190	4	-	391-0025-2005
1,25 / 32	36	2,700	0,650	20,0	0,280	4	-	391-0032-2005
1,5 / 38	43	2,600	0,600	24,0	0,310	4	-	391-0038-2005
- / 41	46	2,600	0,590	25,5	0,315	-	4	391-0041-2005
1,75 / 44-45	49	2,600	0,580	27,0	0,320	4	-	391-0044-2005
2 / 50-51	56	2,600	0,520	30,5	0,360	4	-	391-0051-2005
2,25 / 57	62	2,500	0,480	33,5	0,430	4	-	391-0057-2005
2,5 / 63-65	68	2,400	0,460	36,5	0,490	4	-	391-0063-2005
- / 70	75	2,100	0,440	40,0	0,540	4	-	391-0070-2005
3 / 75-76	81	2,100	0,430	43,0	0,580	4	-	391-0076-2005
- / 80	85	2,100	0,420	45,0	0,610	4	-	391-0080-2005
3,2 / 83	88	2,100	0,410	46,5	0,630	4	-	391-0083-2005
3,5 / 89-90	94	2,000	0,400	49,5	0,690	4	-	391-0089-2005
- / 95	100	1,900	0,370	52,5	0,730	4	-	391-0095-2005
4 / 100-102	107	1,900	0,350	56,0	0,770	4	-	391-0102-2005
- / 108	114	1,800	0,330	60,0	0,810	4	-	391-0108-2005
4,5 / 114	120	1,500	0,300	63,0	0,850	4	-	391-0114-2005
- / 121	127	1,500	0,240	66,5	0,890	4	-	391-0121-2005
5 / 125-127	133	1,400	0,230	69,5	0,930	4	-	391-0127-2005
5,5 / 140	146	1,300	0,200	76,0	1,000	4	-	391-0140-2005
6 / 150-152	158	1,200	0,170	82,0	1,200	4	-	391-0152-2005
6,3 / 160	166	1,100	0,160	86,0	1,280	-	4	391-0160-2005
6,5 / 165	171	1,100	0,140	88,5	1,380	-	4	391-0165-2005
7 / 178	184	1,000	0,120	95,0	1,430	4	-	391-0178-2005
8 / 200-203	209	0,700	0,090	107,5	1,650	4	-	391-0203-2005
10 / 254	260	0,500	0,070	133,0	2,090	4	-	391-0254-2005
12 / 305	311	0,500	0,070	158,5	2,610	4	-	391-0305-2005

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. Additional technical data at www.norres.com. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data.

AUCKLAND
144 NELSON ST
ONEHUNGA
AUCKLAND 1061
T: 09 636 5902
F: 09 634 6655

WHANGAREI
43 PORT ROAD
WHANGAREI
0110
T: 09 438 1598
F: 09 438 1599

HAMILTON
18 KING ST
FRANKTON
HAMILTON 3204
T: 07 847 7889
F: 07 846 9056

MT MAUNGANUI
69 HULL ROAD
MT MAUNGANUI
3116
T: 07 575 5697
F: 07 575 5297

WELLINGTON
148 HUTT ROAD
PETONE
LOWER HUTT 5012
T: 04 560 3701
F: 04 560 3705

NELSON
27B FORESTS ROAD
STOKE
NELSON 7010
T: 03 5470531
F: 03 5470532

CHRISTCHURCH
252 ANNEX ROAD
MIDDLETON
CHRISTCHURCH 8024
T: 03 348 8755
F: 03 348 8756

DUNEDIN
52 TEVIOT
S DUNEDIN
DUNEDIN 9012
T: 03 455 7657
F: 03 455 7687