

# OIL DISTRIBUTION PUMPS - Series 600

Ratio **3:1** - Capacity **14 l/min**

**NBR** Seals

## Art. 0A20001

**Modular distribution pump**

N° 1 packing m<sup>3</sup> 0,010 Kg 4,4

## Art. 0A20101

**Modular distribution pump with customisable 1" suction tube**

N° 1 packing m<sup>3</sup> 0,010 Kg 5

## Art. 0A20103

**Distribution pump with 1250 mm suction tube and bung adaptor**

N° 1 packing m<sup>3</sup> 0,020 Kg 6,8

## Art. 0A20073

**Distribution pump for drums of 50 - 60 Kg with 740 mm suction tube**

N° 1 packing m<sup>3</sup> 0,020 Kg 5,7

## Art. 0A20076

**Distribution pump for drums of 50 - 60 Kg with 740 mm suction tube and bung adaptor**

N° 1 packing m<sup>3</sup> 0,020 Kg 5,8

## Art. 0A20094

**Distribution pump for drums of 180 - 220 Kg with 940 mm suction tube**

N° 1 packing m<sup>3</sup> 0,020 Kg 6,4


## Art. 0A20096

**Distribution pump for drums of 180 - 220 Kg with 940 mm suction tube and bung adaptor**

N° 1 packing m<sup>3</sup> 0,020 Kg 6,5

**Series 600 air-operated oil pumps for medium-distance distribution. Ideal for distributing medium/high-viscosity oil and antifreeze liquid. Suitable for movable installations and fixed systems. The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 40), enables numerous uses through the application of modular extensions.**

**A** 8 bar (116 psi)    **B** 6 bar (87 psi)    **C** 4 bar (58 psi)

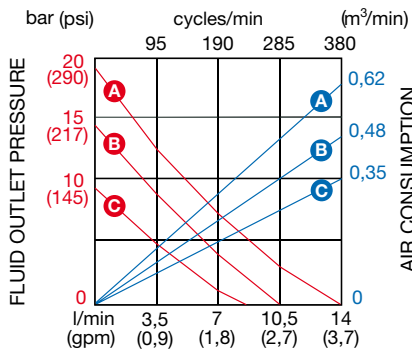

KIND OF FLUID: SAE30 oil (ISO VG 100) - 20 °C



Article	0A20001	0A20101	0A20103	0A20073	0A20076	0A20094	0A20096
Art. with bung adaptor (Art. 0A22155)	-			-		-	
Compression ratio	3:1	3:1	3:1	3:1	3:1	3:1	3:1
Air inlet connection	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Oil outlet connection	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G
Working pressure	6 - 8 bar	6 - 8 bar	6 - 8 bar	6 - 8 bar	6 - 8 bar	6 - 8 bar	6 - 8 bar
Max. pressure	8 bar	8 bar	8 bar	8 bar	8 bar	8 bar	8 bar
Air consumption	330 l/min	330 l/min	330 l/min	330 l/min	330 l/min	330 l/min	330 l/min
Relative capacity (free outlet at 6 bar)	14 l/min	14 l/min	14 l/min	14 l/min	14 l/min	14 l/min	14 l/min
Noise level	81 dB	81 dB	81 dB	81 dB	81 dB	81 dB	81 dB
Temperature oil delivered	-10 +50 °C	-10 +50 °C	-10 +50 °C	-10 +50 °C	-10 +50 °C	-10 +50 °C	-10 +50 °C
Max. viscosity oil delivered	130 SAE	130 SAE	130 SAE	130 SAE	130 SAE	130 SAE	130 SAE
Length suction tube	270 mm	customisable 1"	1250 mm	730 mm	730 mm	940 mm	940 mm
Suction tube diameter	wall mounted	42 mm	42 mm	42 mm	42 mm	42 mm	42 mm