




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1448188	5	12/61	12	0,47	10	150	30	450	0,12	0,08	40	1,6	100	328
1448196	6	17/72	13	0,51	10	150	30	450	0,14	0,09	50	2,0	100	328
1448200	8	5/16	15	0,59	10	150	30	450	0,16	0,11	65	2,6	100	328
1448218	10	25/64	17	0,67	10	150	30	450	0,19	0,13	80	3,2	100	328
1448226	13	1/2	20	0,79	10	150	30	450	0,23	0,15	105	4,1	60	200
1448234	15	19/32	23	0,91	10	150	30	450	0,30	0,20	120	4,7	60	200
1448242	19	3/4	27	1,06	10	150	30	450	0,37	0,25	150	5,9	60	200
1448250	25	1	35	1,38	10	150	30	450	0,60	0,40	200	7,9	40	131

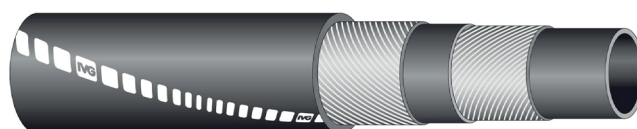

EN

## Extruded hose for fuels

Application: suitable for delivery of fuels and for lubrication and greasing in different services.

Temperature: from -20°C (-4°F) to +70°C (+158°F).

### Construction

Tube: black, seamless NBR conductive rubber, suitable to convey fuel and oils with aromatic content up to 50%.

Reinforcement: high strength synthetic fabrics.

Cover: black, seamless PVC/NBR rubber, resistant to fuel, oil, and weathering.

Electrical Resistance: tube  $R \leq 1 \times 10^6 \Omega/m$ .

Branding: IVG RUBBER HOSE CARBUR 10 BAR W.P. - SIZE - 50% Aromatico - BATCH NUMBER.

