

## INDUSTRIAL CLEANING AND WASTE MANAGEMENT APOLLO SE



### APOLLO SE

**Colour:** light blue with an extruded red stripe.

**Temperature range:** - 25°C + 60°C.


**Features:** Pvc hose reinforced with an anti-shock rigid Pvc spiral. **Special formulation particularly suitable to be used at low temperatures.** Inside surface smooth, light corrugation outside. Strong and flexible, resistant to crushing, abrasion, atmospheric agents and most chemicals.

**Applications:** excellent for suction in general, particularly suitable to be used on tank trucks thanks to its physical- mechanical features.


**Can be manufactured antistatic upon request.**

### Technical Data

Part Number	Inside Ø	Max. Wall Thickness	Spess. Max.	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H2O	mm	m	m <sup>3</sup>
AX 01 025	25	3,4	3,8	410	6	18	10	100	50	0,094
AX 01 032	31,8	3,9	4,3	590	6	18	10	130	50	0,143
AX 01 038	38,1	3,9	4,4	690	5	15	10	155	50	0,190
AX 01 040	40	3,9	4,4	720	5	15	10	160	50	0,207
AX 01 050	50	4,3	4,9	980	4	12	10	200	50	0,311
AX 01 052	50,8	4,3	4,9	990	4	12	10	200	50	0,315
AX 01 060	60	4,5	5,2	1230	4	12	9	240	50	0,461
AX 01 063	63,5	4,8	5,5	1390	4	12	9	260	50	0,503
AX 01 070	70	5,0	5,8	1580	3	9	9	280	50	0,603
AX 01 076	76,2	5,0	5,7	1670	3	9	9	310	50	0,648
AX 01 080	80	5,1	6,0	1820	3	9	9	320	50	0,722
AX 01 090	90	5,3	6,3	2120	3	9	9	360	30	0,620
AX 01 100	100	6,0	7,0	2660	3	9	8,5	410	30	0,770
AX 01 102	102	6,0	7,0	2710	3	9	8,5	410	30	0,784
AX 01 105	105	6,0	7,0	2760	3	9	8,5	430	30	0,803
AX 01 110	110	6,1	7,2	2950	3	9	8,5	450	30	0,955
AX 01 120	120	6,3	7,4	3300	2,5	7,5	8	480	30	1,141
AX 01 127	127	6,4	7,5	3550	2,5	7,5	8	510	30	1,231
AX 01 150	151,5	7,3	8,6	4930	2	6	8	610	20	1,323
AX 01 152	152,4	7,6	8,9	5120	2	6	8	610	20	1,335
AX 01 160	160	7,9	9,3	5510	2	6	7	660	20	1,428
AX 01 200	200	10,9	12,1	9890	1,5	4,5	7	850	10	2,171

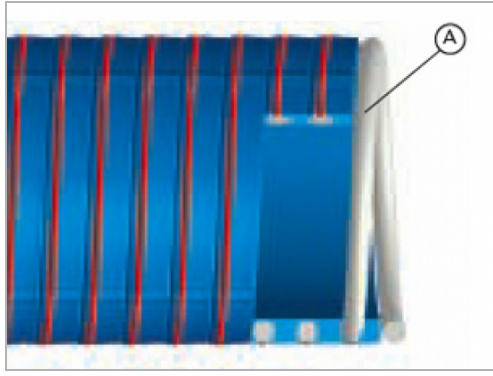

Anti-shock rigid PVC spiral

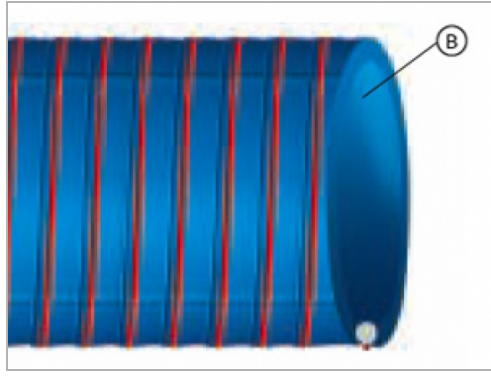

Superealistic PVC compound