


GATE VALVE

Model: EH1203
Italy type forged brass gate valve, PN20 ISO228 thread

Size: 1/2" ~ 4"



TECHNICAL FEATURES:

Suitable for domestic water services and heating plants. Minimum and maximum working temperature: 0°C, 120°C in absence of steam. Available: in all sizes from 1/2" up to 4"

MATERIALS:

Valve Body: Brass
Handle: Steel
Stem: Brass
Seat: Brass
Bonnet: Brass
O-Ring: P.T.F.E


Size(mm)	1/2"	3/4"	1"	1-1/4"	1 1/2"	2"
A	41.7	45.9	51.1	59.2	63	66.4
B	12.8	14.3	16.3	17	17	18.4
C	14.2	18.1	23.2	31.6	36	47.1
D	50.5	55.5	58.5	69.7	80	90
E	71.9	80.2	87.4	113.6	135	183.6

PC 65 50

CHECK VALVE

Model: EH1231
EUROPA model forged brass check valve, ISO228 thread PN16

Size: 3/8" ~ 4"



TECHNICAL FEATURES:

Suitable for domestic water services, heating and air-conditioning plants, compressed air systems. It can be installed in any position: vertical, horizontal, oblique. Minimum and maximum working temperature: -20°C, 100°C Available: in all sizes from 3/8" up to 4"

MATERIALS:

Valve Body: Brass
Plate: Brass
Seal: NBR
Stem: Brass
Spring: SS304
Seat Washer: NBR


Size(mm)	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
A	52	57.5	64	71.5	81.5	93.5	98.5
B	28	34	40.5	46	59.7	69.2	86.5
C	S20	S26.8	S32.6	S39.5	49.5	S54.5	S69
D	3/8	G1/2	G3/4	G1	G1-1/4	G1-1/2	G2
E	42	47.5	50	50	68	81	87.5

PC 65 20

SS FILTER

Model: EH1234
S.S filter only ISO228 thread

Size: 3/8" ~ 4"



TECHNICAL FEATURES:

Strainer in stainless steel Threaded end in nylon

MATERIALS:

Stainless steel and nylon


Size(mm)	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
A	42	47	57	69	75	83	98	123	138	153
B	22.5	28	33	41.5	50	55	68	102	102	129

PC 65 60

Y-STRAINER

Model: EH1240
Forged brass y-strainer, brass, PN20 ISO228 thread

Size: 3/8" ~ 2"

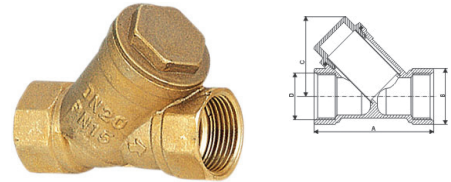

TECHNICAL FEATURES:

Suitable for domestic water services, heating and air-conditioning plants, compressed air systems. Minimum and maximum working temperature: -20°C, 110°C. Available: in all sizes from 3/8" up to 2"

MATERIALS:


Valve Body: Brass
Cap: Brass
Filter: Stainless steel

Size(mm)	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
A	55	62	69.5	79	94.5	104.5	130 x
B	10	15	20	25	32	40	50
C	25	32	38.5	47	55.5	68	83
D	65.5	96	96	120	114.5	176	176
E	42	47.5	50	50	68	81	87.5

PC 65 80

SWING CHECK VALVE

Model: EH1227

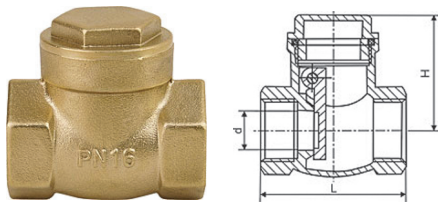

TECHNICAL FEATURES:

Nominal Pressure: 1.6MPa
Working Medium: Water, Non-corrosive liquid, pneumatic, hot water, oil
Working Temperature: 90°C
Pipe Thread to ISO228
Available: up to 4"

Size(mm)	1/2"	3/4"	1"	1-1/4"	1 1/2"	2"
DN	15	20	25	32	40	50
d	13	19	23	30	36	46
H	35	40	47	52	58	67
L	48	58	67	74	86	95


PC 65 40

3-WAY BALL VALVE

Model: EH1032

Forged brass full flow ball valve, 3-way valve ISO228 thread PN40

Size: 1/2", 3/4"

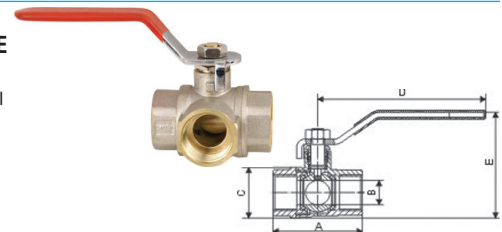

TECHNICAL FEATURES:

Suitable for domestic water services, heating and air-conditioning plants, compressed air systems.

Minimum and maximum working temperature: -15°C, 120°C. Available: in all sizes from 1/2" up to 3/4".

MATERIALS:

Valve Body: Brass
Handle: Steel
Ball: Hard chrome-plated brass
Seal: P.T.F.E.
Stem: Brass
Stem-seal: Brass
O-Ring: P.T.F.E.

Size(mm)	1/2"	3/4"
A	58.35	64.4
B	14.2	20
C	31.2	38.6
D	107.9	107.9
E	55.6	59.6

PC 65 10